





METAXDOOR GL30/SA

Automatic Glass
Revolving Door

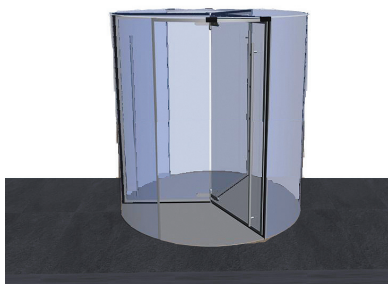

3-Wing-Automatic All Glass Revolving Door

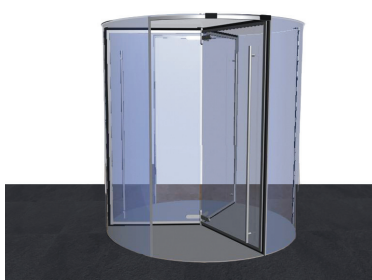

4-Wing-Automatic All Glass Revolving Door



Night Shield






“If design is the keyword in your building’s exteriors and you do not want to give up usage features of revolving door systems; METAXDOOR GL30/SA all glass revolving doors are the solution you are looking for.”

METAXDOOR GL30/SA glass revolving door is made of complete glass and slim stainless steel profiles. It is designed to fit effortlessly into transparent facades. It can be used automatic with the RevoMASTER mechanism, which is concealed under the floor in order not to affect transparency.

With intelligent sensing system specially developed for glass revolving doors, METAXDOOR GL30/SA offers safe entrance solutions. Besides all these functions, it also provides you with insulation and smooth flow of standard revolving doors and enables you to create the entrance of your dreams.

“You Dream, We Make”

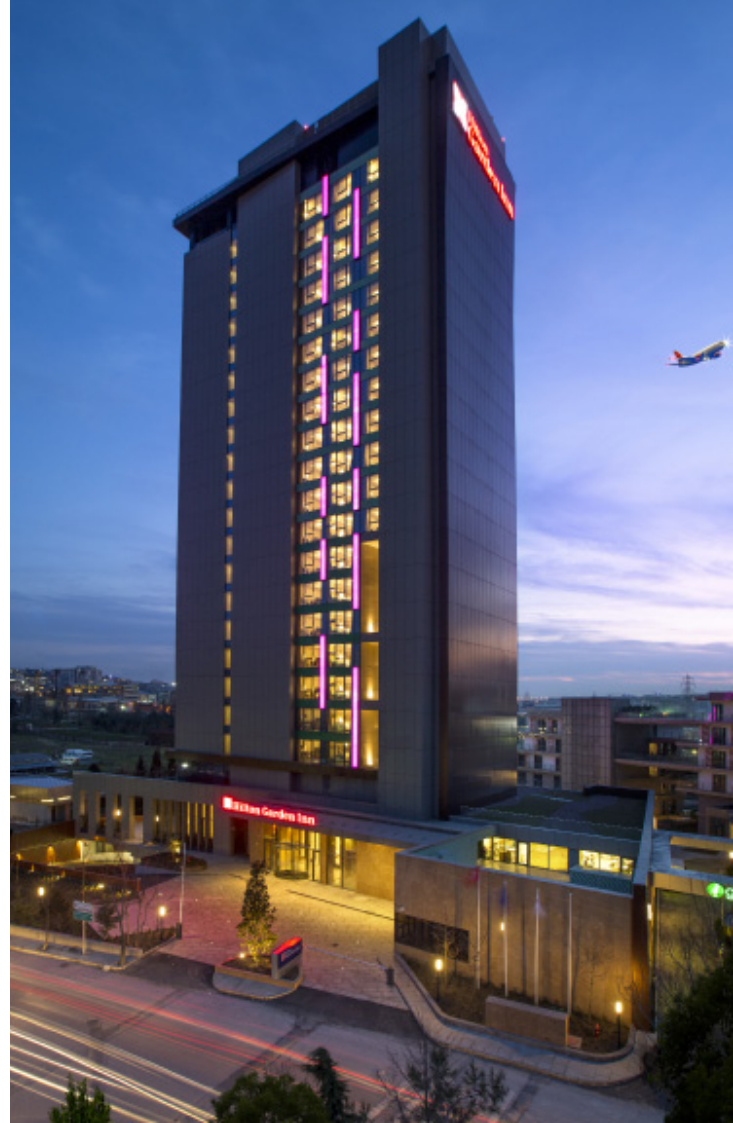




D	H	W/3	W/4	D1
2000	2100-2600	950	1370	1940
2100	2100-2600	1000	1440	2040
2200	2100-2600	1050	1510	2140
2300	2100-2600	1100	1580	2240
2400	2100-2600	1150	1650	2340
2500	2100-2600	1200	1720	2440
2600	2100-2600	1250	1790	2540
2700	2100-2400	1300	1860	2640
2800	2100-2400	1350	1930	2740
2900	2100-2400	1400	2000	2840
3000	2100-2400	1450	2070	2940

* Dimensions are in millimeters.


** Dimensions are for reference and are subject to change on static requirements.


***Special dimensions available upon requirements.

**** Dimensions are for information purposes only and are subject to change on static requirements.

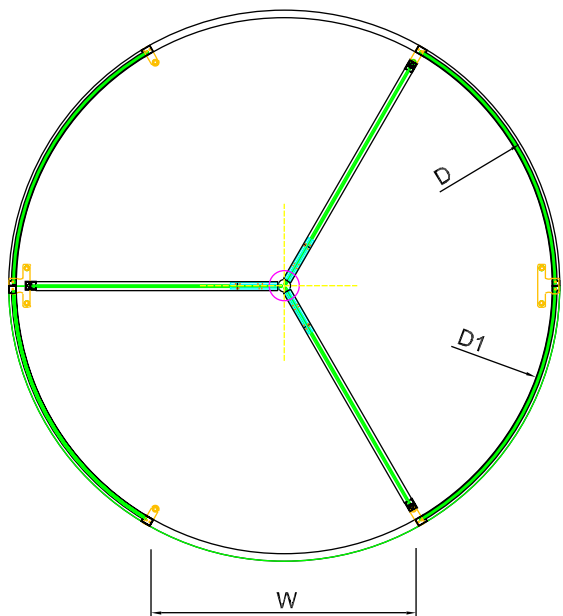

D: Outer Diameter
D1: Inside Diameter
W: Passage Width
H: Passage Height

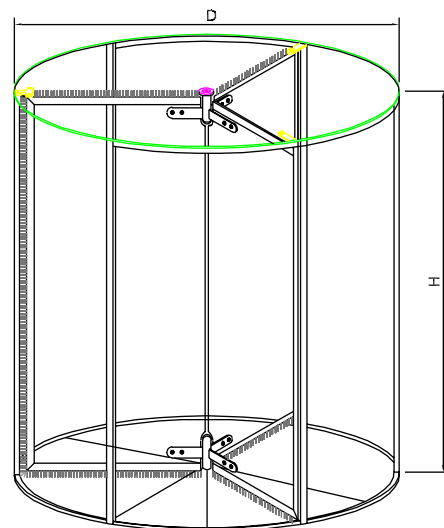

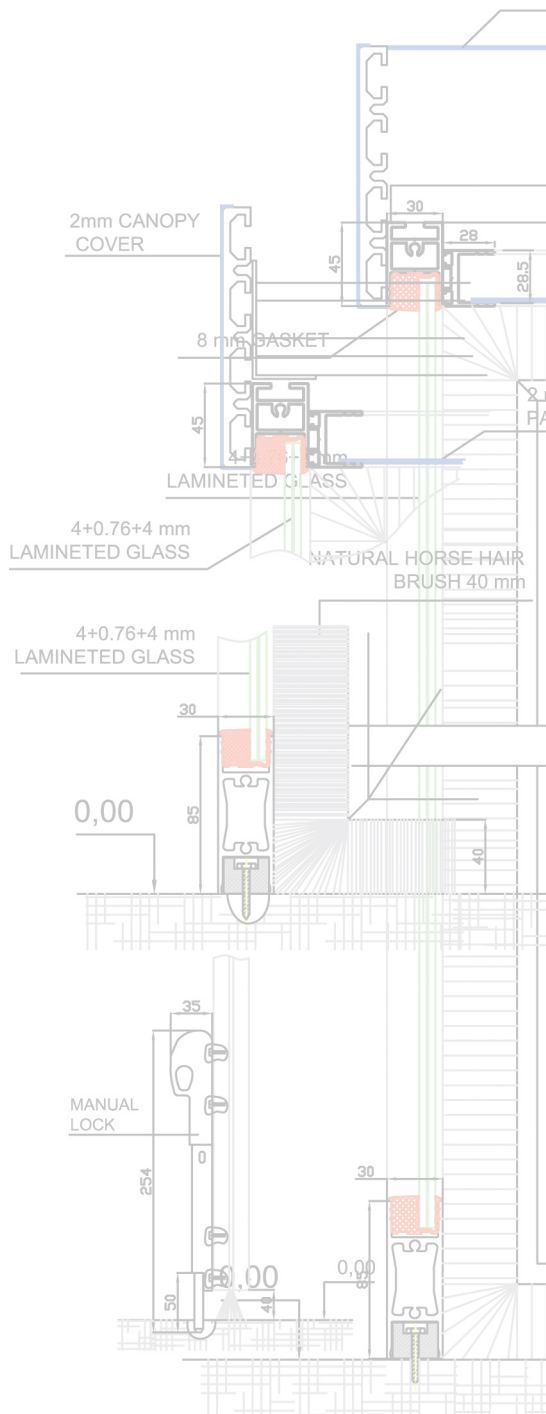

Technical Specifications

Power Supply	220 V AC / 50-60 Hz	
Motor	RevoMASTER AC Motor	
Working Temperature	-20 °C - +55 °C	
Fixed Wings	Standard 5+5 Laminated Glass	
Moving Wings	Standard 8 mm Tempered Glass	
Ceiling Glass	10+0,76+6 mm Tempered Laminated Glass	
Speed Control	Standard	
Disabled Access System	Standard	
Locking	Electromagnetic Motor Lock	
Hand Safety Edge	Standard	
Stainless Steel Cladding	Standard	
Floor Mat		Optional
Floor Ring	Standard	
Transparent Ceiling Glass	Standard	
Extra Clear Glass		Optional
Night Shield		Optional
Espagnolette Lock		Optional
Underground Mechanism	Standard	
Night Mode	Standard	
Push&Go Mode	Standard	
Microwave Radar	Standard	
Summer Mode	Standard	
Slow Mode	Standard	
Automatic Mode	Standard	

* Contact for special requests upon project basis



Activation

Metaxdoor revolving doors provide users with a wide range of activation alternatives.

Various activation options such as radar, code panel, card reader, touchless sensor switch, elbow button, fingerprint reader, remote control, etc. are manufactured to work compatible with the system. These options provide you with an entrance control free of problems.

Wings


A harmony is created by the unique designed frame profiles and natural horse hair brushes surrounding the frame in the wings of Metaxdoor revolving door systems. With this harmony; air, dust and noise insulation is maximized. The unique design used in the profiles provides Metaxdoor revolving door systems with toughness along with an extremely chic look.

Glasses

As standard; 4+4mm curved laminated glasses are used on fixed frames and 8 mm tempered glasses are used on the moving wings. 5+5 mm curved laminated and 10 mm tempered glasses can also be used upon demand. Providing these qualities and dimensions; any kind of color and colored reflected glasses can be used as options on the system. Glasses are protected from outside effects by glass seals.



MANUFACTURER OF AUTOMATIC
DOORS SYSTEMS

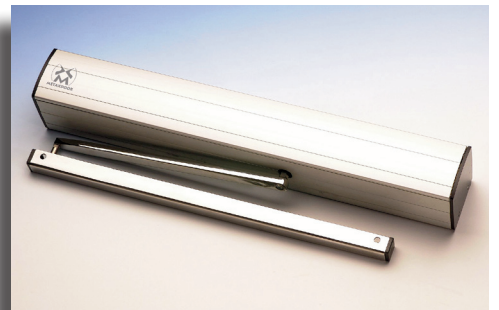

HTM METAXDOOR GmbH

Bredeneyer Str. 2b 45133 Essen

Tel : 0201 4517-322

Fax: 0201 4517-323

www.metaxdoor.de

info@metaxdoor.de

