



Revolving Doors











METAXDOOR HM30

Automatic Sliding Doors

METAXDOOR AUTOMATIC SLIDING DOORS



HM30/SLD Sliding Door



HM30/GLS Automatic Glass Sliding Door



HM30/TLS Automatic Telescopic Sliding Door



METAXDOOR HM30/SLD



"Wherever you need a durable and economical entrance, Metaxdoor HM30/SLD sliding door system is the solution for you."

Automatic sliding doors are very popular choices for almost any application such as; retail stores, municipality and industrial buildings, residences, hospitals and security complexes.


METAXDOOR sliding door systems meet your specifications and are built to suit your architectural designs. These systems offer a range of standard features which are attractive, functional and reliable and may suggest options to flexibly fit every entrance requirement.

METAXDOOR sliding door systems are also dependable in performance and provide you with a range of finishes as RAL electrostatic powder coating or other natural polishing applications.



"You Dream, We Make"

METAXDOOR HM30/GLS

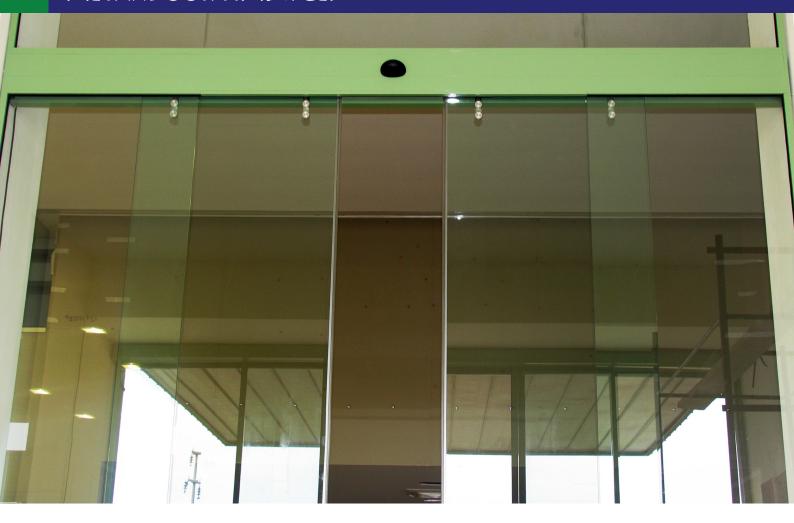

"When it is required more transparency, wider area and attractive depth for the places, the right product is definitely HM30/GLS that is completely automatic glass sliding system."

METAXDOOR HM30/GLS, is presented to users in order to compose the constructive details with a mechanism by electromechanically.

METAXDOOR HM30/GLS,is the door system that is prefered for business buildings,public buildings,industrial faciliti es,schools,hotels,hospital,factories,shopping malls etc. METAXDOOR HM30/GLS,is the door system that is respond to all requirements for each range.

METAXDOOR HM30/GLS,is the door entrance system that is prefered securely because of that it has flexible structure,easy installation,conformance to national and international standards,wide design flexibility for the architectures,visual,technical and successful solutions.



"You Dream, We Make"

METAXDOOR HM30/TLS



"Metaxdoor HM30/TLS automatic telescopic sliding door system is the ideal system that presents compact solutions for wide entrances."

METAXDOOR HM30/TLS provides you with opening options of single or double directions; sliding towards the wall or itself.


Telescopic doors mostly offer ideal solutions for application areas with corridor-type restricted sizes by sliding four wings towards single and double directions.

METAXDOOR HM30/TLS sliding door operates quickly and silently. When you need a wide opening, HM30/TLS is the right solutions that you can use very securely with functional radars and control devices.



"You Dream, We Make"

METAXDOOR AUTOMATIC SLIDING DOOR

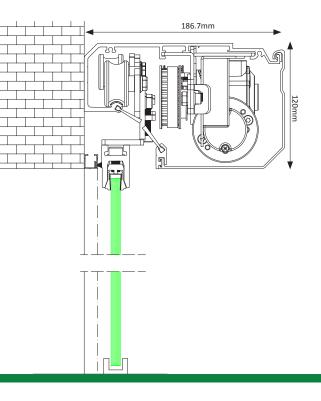

Dunker DC Motor

METAXDOOR automatic sliding door systems work smoothly with brush DC motor which country of origin is German for long times.

Dunker motors which make the wings' moving perfect with their powerful, quality system, work rather silent and come into prominence with its performance.





Digital Position Switch

It is an electronic equipment which is used as an optional features at METAXDOOR sliding door systems and consists of glass panel.

It provides easy usage to change the modes according to weather conditions. It has an aesthetics appearance with led indicators.



Protection Sensor

It is a safety equipment which is installed upon fixed wings for sliding door system. This sensor gives a warning when the wings detect somebody or an object.

It provides comfort passage possibility when entrance and exit traffic is rush-hour time.



Password Panel and Card Reader

METAXDOOR sliding door systems provide high quality efficiency with its various activation systems for usage of doors.



Face Recognition System

When it is required for maximum safety for METAXDOOR automatic systems, it is recommended by METAXDOOR.

The face recognition system is used at public buildings, plazas, factories, storage, lifts and hotels.



Touchless Sensor

It is authorized entrance system of METAXDOOR sliding door system. The touchless sensor which opens the door when it is required, is suitable for handicaple people and old people without being forced too much.



Parmak İzi Okuyucu

It is an extra safety equipment for METAXDOOR automatic systems.

The fingerprint readers can be entegrated to factories, plazas and the places where is necessary for safety when it is required to be controlled the passages




Power Supply

METAXDOOR automatic entrance system has a solution with various UPS to work in case of failure.

It provides to continue operation modes and at the same time it keep on working locking system so that it provides maximum safety.


METAXDOOR AUTOMATIC SLIDING DOORS

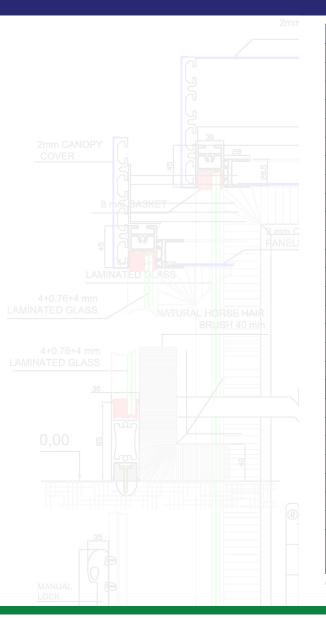


Technical Specifications		
Processor	СОМВО	
Motor	24 V Dunkeren Brush	
Max. Motor Power/Ava.	240/100 W	
Working Voltage	AC 220 V 50/60 Hz 1.9 A	
Working Temperature	-20 °C - +55 °C	
Pullley System	3 Wheel Pulley	
Gear Material	Powder Metallurgy	
Transmission	Cog Belt	
Control System	Microprocessor	
Adjustable Function	14 Function	
Protection System	Stepped Current Protection	
Opening Speed	10 - 1500 mm / sec	
Keep Open Time	1 - 60 / sec	
	Single Wing	Double Wing
Capacity(kg)	140 kg	2 x 90 kg
Manual Opening Power	2,5 - 4 kg	3 - 5 kg
Optimum Distance (mm)	600 - 5000	500 - 6500
Maximum Distance (mm)	6500	1200
Mechanical Specifications		
Anodized Cladding	Standard	
Electrostatic Powder Coating	Standard	
Stainless Steel Cladding	Optional	
Electronic Lock	Optional	
Protection Sensor	Optional	
UPS	Optional	
Emergency Mode	Standard	
Accessories	Remote Control, Touchless Sensor, Touch Panel, Elbow Button, Fingerprint Reader, Password Access Control,Card Reader Access,Face Recognition System,etc. activation systems.	

^{*}Please contact us for special designs according to your projects.

METAXDOOR HM30/SLD, HM30/GLS

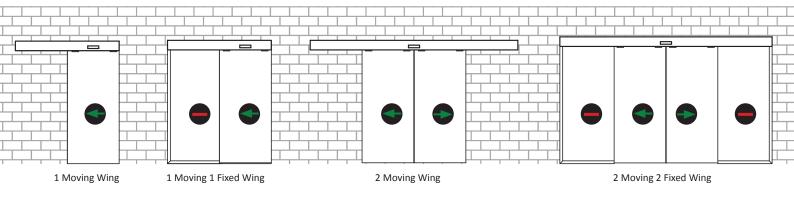


METAXDOOR HM30/TLS

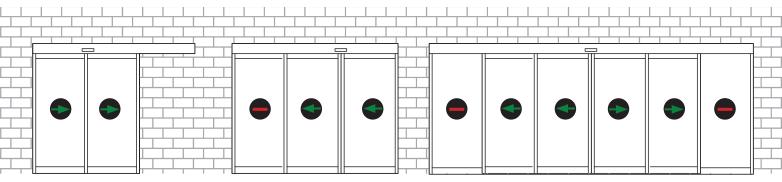

2 Moving Wing 2 Moving 1 Fixed Wing 4 Moving 2 Fixed Wing





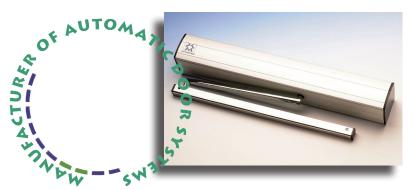





HTM METAXDOOR GmbH

Bredeneyer Str. 2b 45133 Essen

Tel: 0201 4517-322
Fax: 0201 4517-323
www.metaxdoor.de
info@metaxdoor.de

